


Truckline TL10

Fit for the calibration of ADAS cameras and radarsystems - ask for our solutions.




PRÄZISION, DIE MAN SPÜRT.

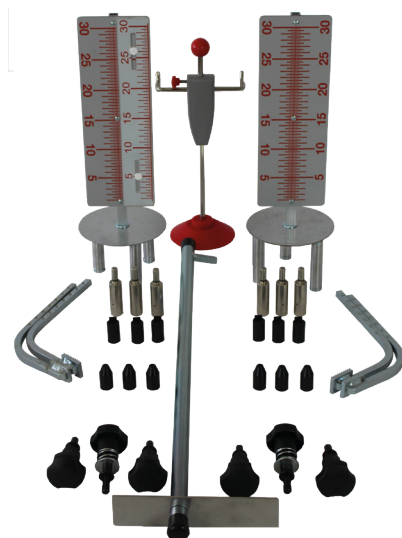

Car-Kit

The measuring heads can also be used on car rims. To do so, the magnet spacers are replaced by car-adapters (optional Car-Set). The attachment is carried out by the special tensioner via the tire blanket. The installation onto car rims (10-21") is possible. Car-Set delivery content see figure.

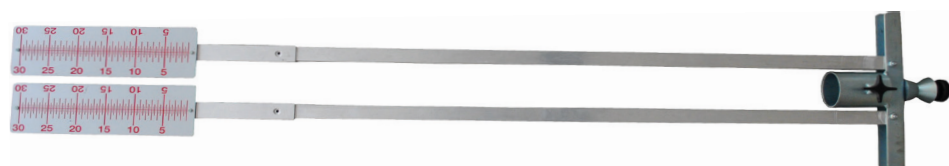

Trailer- and Clingerscales

folding/adjustable for vehicles from 1,2 to 3 m track width. The attachment to a trailer is carried out at the king pin, whilst the attachment to a clinger is carried out at the drawbar eye with two centering cones.



Turntable/Sliding plate

Top-quality turntables with a free-range ball cage, integrated angle display with a stainless steel scale and a vernier.

QUALITY - MADE IN GERMANY
SIMPLE AND MOBILE APPLICATION
EXPANDABLE TO CAR-ALIGNMENT



Truckline TL10



PRÄZISION, DIE MAN SPÜRT.



The All-Rounder



WMS Wagner GmbH

WagnerMessSysteme
Haidenkofener Str. 16
94522 Wallersdorf

Tel 09933 902225
Fax 09933 892891

info@wmswagner.de
www.wmswagner.de

Truckline TL10



VERSATILE APPLICATION

For transporters, trucks, buses, trailers, clingers and other vehicles. Fit for trucks with multiple steering axles. Measurement in reference to the frame.



FREE OF NET-SUPPLY

The Application on a flat surface without power supply is possible.



Electronic measure of camber and castor

> The three main goals of truck alignment like total toe, center position of steering gear and angular tilt of axle can get measured and aligned fastly. All adjustment is done according to the centre line of the frame. Die Einstellung erfolgt zur Rahmenmitte.

> Fast, easy, and versatile: wether use at tractor, two steering axles, semi-trailer, trailer or bus. **Always the best choice - Truckline.**

> With an optional set the unit TL10 can get used on passenger cars, even with alloy rims.

> No lifting of the truck, stay in driving conditions.

> Align semi-trailers according to the king-pin.



COMPETENCE

Determination of all underbodyspecific data (Lane, drop, post-carriage, lanedifference angle, axis mismatch, axle angle, center position of steering gear)




USER FRIENDLY APPLICATION

Magnetic attachment of the wheel holders to steel rims, special clamping for aluminium rims.



ROBUST QUALITY

The firm three-point-holder off aluminium and dirt-resistant turntables special for trucks and similar vehicles grant longtime utilisability.

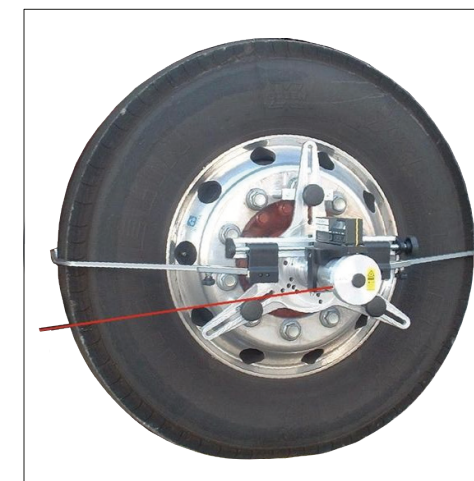

The measuring head is magnetically attached onto the steelrim. Onto Aluminium rims attachment with special tensioners is possible.

A fast and simple montage is granted. The laserunit of the measuring head is slewable. The laserunit is supplied with power through rechargeable batteries.

One for All.

